



**McCloskey  
Environmental**


**BUILDING SMARTER EQUIPMENT  
TO HELP MINIMISE THE WORLD'S WASTE**



**McCloskey**  
Environmental



**SHREDDERS**  
**TROMMELS**  
**SCREENERS**  
**STACKERS**

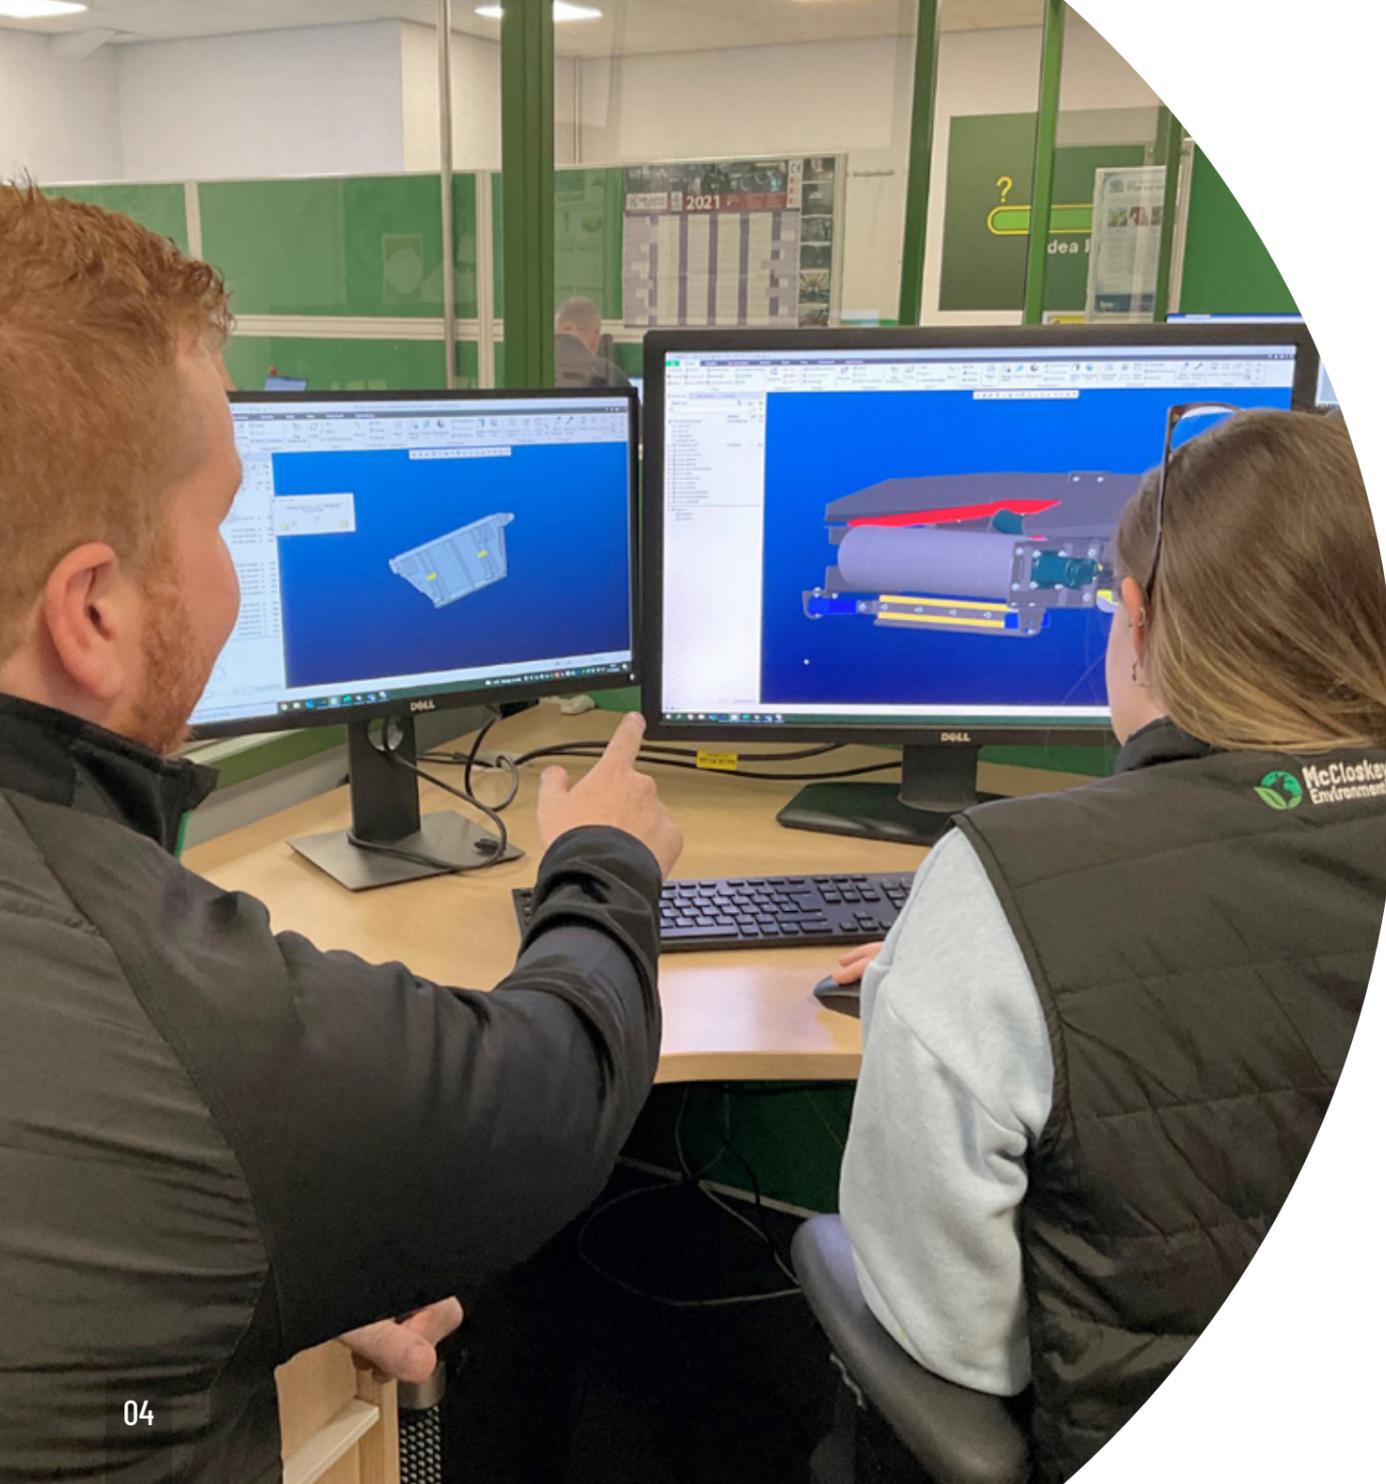

# WHO WE ARE.

## EXPERIENCE, EXPERTISE, SOLUTIONS

**We are McCloskey Environmental.** An evolution of waste recycling equipment designed to solve real world challenges. Every customer experience begins and ends with support from people at a company with a heritage of strong values 35+ years of knowledge.

As the world around us changes and new challenges arise, we believe we have a greater responsibility than ever before, we recognise that we have a role to play in the Environmental sustainability of our planet.

Headquarters in N. Ireland, renowned worldwide for its expertise in producing high quality, cost effective equipment for the world market. We are developing smarter solutions for our partners across the globe to facilitate a sustainable future.

Designing, manufacturing and delivering a complete line of environmental equipment; Shredders, Trommels, Screeners and Stacker Range.

The products are used in a wide range of industries; recycling, aggregates, landscaping, infrastructure and road building, construction and demolition, mining, and waste management.

McCloskey™ is the world's leading recycling manufacturer and has **pioneered trommel design** and innovation. Over the past 35+ years, the Trommel and Stacker range has established a **proven reliability** in construction and demolition, topsoil, compost, waste recycling, and many other large screening applications.



# OUR GROWTH

McCloskey has developed significantly in recent years, bringing companies into the group, through acquisitions has been a big part of this. McCloskey are owned by Metso group, having been acquired in 2019.

With a global presence on five continents, we are committed to working towards a smarter approach to waste.

# OUR VISION

McCloskey Environmental partners with companies that have the expertise to deliver not just products, but solutions that maximise profit and deliver exceptional performance.

## SHREDDER RANGE

# ← S-250

The ES-250 is a tracked primary shredder capable of effectively and reliably shredding virtually any type of material. Designed to meet the needs of plants in which the incoming materials vary greatly in terms of size, composition, and difficulty to shred.

The interaction between the rotating knives on the dual shafts running asynchronously in both directions ensures the input material is constantly moving to prevent bridging and maximizing shredding efficiency.



DIESEL



DUAL POWER



## FEATURES

- Aggressive 8 Knife, heavy duty cutting table
- Danfoss electrical control unit
- Variable speed main conveyor
- 4 Meter tracks for superior maneuverability and stability
- Volvo C15 403 KW (540HP) Stage V/Tier 4 Final
- Fuel efficient hydraulics system
- User friendly hydraulic controls
- Double hydrostatic drive transmission

## DIMENSIONS AND CAPACITIES

Length - Working (Max)	15.1m (49'-7")
Height - Working (Max)	3.5m (11'-6")
Length - Transport	9.54m (31'-4")
Width - Transport	3.01m (9'-11")
Height - Transport	3.50m (11'-6")
Maximum Production Rate	100TPH (11v0 USTPH) (Material Dependent)
Average Fuel Consumption	60 L/Hour (15.5 US Gal)
Machine Weight	35,000KG (77,160 lbs.)

## CUTTING TABLE

Number of shafts	2
Rotating speed	16-41/27-56 RPM
Number of knives	8/10
Number of counter knives	16/20
Cutting area	2420mm X 2000mm (95" X 79")
Knife type	Shear Table
Chamber weight	14,900KG (32,850 lbs.)

## CAPACITY PER HOUR

Household Waste	Up to 100 Ton
Demolition Wood	Up to 70 Ton
Industrial Waste	Up to 35 Ton
Bulk Waste	Up to 50 Ton

## SHREDDER RANGE

# ← SS-300

## TRACK SHREDDER

The ESS-300 is a tracked primary shredder capable of effectively and reliably shredding a wide range and type of material. The ESS-300 is designed to meet the needs of plants in which the incoming materials vary greatly in terms of size, composition, and difficulty to shred.

The interaction between the rotating knives on the single, hydraulically driven shaft ensures the input material is constantly moving to prevent bridging and maximizing shredding efficiency. The replaceable mesh setup allows the machine to perform to a number of different specifications of output material, with varying piece size. The quick change nature of these meshes is possible because of a side opening on the chamber which is opened and closed via hydraulic cylinder.



DIESEL



DUAL POWER



## FEATURES

- Aggressive multi-tooth cutting shaft
- Intelligent electrical control unit
- Variable speed main conveyor
- 4 Meter tracks for superior maneuverability and stability
- VOLVO C15 380kw (510HP) Stage V/Tier 4 Final
- Fuel efficient hydraulics system
- User friendly hydraulic controls
- Double hydrostatic drive transmission

## DIMENSIONS AND CAPACITIES

Length - Working (Max)	15.64m (51'-4")
Height - Working (Max)	3.5m (11'-6")
Length - Transport	9.94m (32'-7")
Width - Transport	3.01m (9'-11")
Height - Transport	3.69m (12'-2")
Maximum Production Rate	60 TPH (66 USTPH) (Material Dependent)
Average Fuel Consumption	60 L/Hour (15.5 US Gal)
Machine Weight	35,000KG (77,160 lbs.)

## STACKER RANGE

# ←↻ C-50

### HIGHLY MOBILE WHEELED STACKER

The EC-50 is a light duty mobile stockpiling conveyor that has been designed for high capacity stockpiling operations. The conveyor is perfect for both material stockpiling or material transfer between machines.

The machine's small footprint makes it perfect for sites with spatial constraints.

Four of these units can be transported in a 40ft, high cube, open top container, thereby substantially reducing transport costs.



DIESEL/HYDRAULICS



DUAL POWER



## FEATURES

- 800mm (32") wide heavy duty 50' long conveyor
- Large feed hopper
- Close coupled, diesel powered or electric powered
- Fast on site setup time - 5 minutes
- Adjustable feedboot height to minimize impact
- Feedboot extensions

## DIMENSIONS AND CAPACITIES

Engine	36.5 kW (49 Hp)
Transport Height	3.04m (9' 11")
Transport Length	11.99m (39' 4")
Transport Width	2.49m (8' 2")
Weight	4,100 kg (9,020 lb)
Stockpile Height @ 22 degrees	6.365m (20' 11")
Stockpile Capacity @ 22 degrees	384 cu. m (502 cu. yds.)
Maximum Production Rate	400 TPH (440 USTPH)

## STACKER RANGE

# ←↻ C-65T

### HIGH CAPACITY STOCKPILING

The EC-65T sets the standard for high capacity, high mobility stackers. The EC-65T comes with an impressive array of features, including a large hopper, full-length guarding, an easily accessible engine bay, an impact section under the hopper and an adjustable hopper height. When the EC-65T arrives at a job site, it takes only a few minutes to set up and get to work. As is the case with all McCloskey stackers, the EC-65T features a setback design for maximum stockpiling.

At 65' long, the EC-65T is the entry point for McCloskey tracked stackers, which are also available in 80' and 100'.



DIESEL/HYDRAULICS



DUAL POWER



## FEATURES

- Hydraulic folding head section for transport minimizing setup time
- Hydraulically adjustable discharge height up to 8.4 meters
- Hydraulically adjustable feed in height to compliment crushing and screening plants
- 3.5 Meter tracks for superior maneuverability and stability
- 3 50KW giving a rating of up to 500 TPH (550 USTPH)
- Fuel efficient hydraulics system
- User friendly hydraulic controls
- Hopper HARDOX™ liners
- Heavy duty impact bed

## DIMENSIONS AND CAPACITIES

Engine	Diesel or Dual Power Hp/kW
Length - Transport	12.1m (39' 9")
Width - Transport	2.34m (7' 8")
Height - Transport	2.5m (8' 3")
Weight	10,500 kg approx. (23,148lbs)
Stockpile Height	7.88m (25' 10")
Stockpile Capacity	902m <sup>3</sup> (1180 yd <sup>3</sup> )
Maximum Production Rate	510 TPH (561 USTPH)

## STACKER RANGE

# ←↻ C-80T

### HIGHLY MOBILE TRACKED STACKER

The EC-80T is designed to allow operators to stockpile/transfer material directly from shredding and recycling plants it offers the perfect solution to all your material handling needs. It offers the flexibility and mobility needed to ensure that the stockpiling process is as fast and efficient as possible, it eliminates the use of a loader and also the double handling of materials.

The unit can also be containerized for transport, with minimal setup time, substantially reducing transport costs.



DIESEL/HYDRAULICS



DUAL POWER



## FEATURES

- Hydraulic folding heading section for transport minimizing setup time
- Hydraulically adjustable discharge height up to 11 meters
- Hydraulically adjustable feed in height to compliment shredding and recycling plants
- 4 Meter tracks for superior maneuverability and stability
- CAT 2.2 LRC 44.7KW (600-800 TPH @ 23°)
- Fuel efficient hydraulics system
- User friendly hydraulic controls
- Feed boot HARDOX™ liners
- Heavy duty impact bed

## DIMENSIONS AND CAPACITIES

Engine	36.5 kW (49Hp)
Length - Working (Max)	23.5m (77' 3")
Height - Working (Max)	10.8m (37' 6")
Length - Transport	16.33m (53' 7")
Width - Transport	3.35m (11')
Height - Transport	3.56m (11' 8")
Over Hang - Stockpile	5.44m
Stockpile Height	9.3m (30' 5")
Maximum Production Rate	500 TPH (550 USTPH)

## STACKER RANGE

# ←↻ C-100T

### HIGHLY MOBILE TRACKED STACKER


The EC-100T wheeled stacker reaches new heights increasing the capacity of production operations, and delivering 800TPH of stocked material. Offering the flexibility and mobility needed to ensure that the stockpiling process is as fast and efficient as possible, it eliminates the use of a loader and also the double handling of materials. The unit can also be containerized for transport, with minimal setup time, substantially reducing transport costs.



DIESEL/HYDRAULICS



DUAL POWER

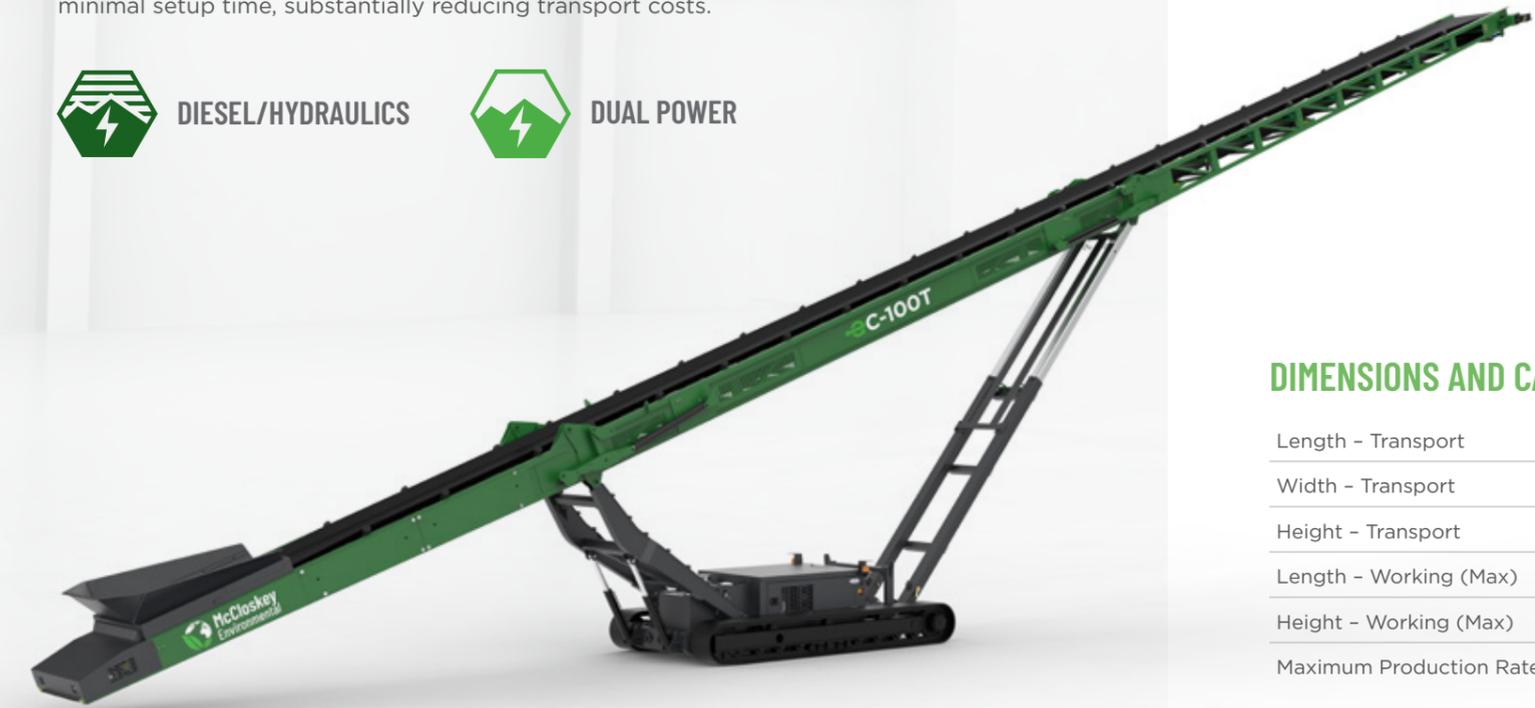

## FEATURES

- Hydraulically adjustable discharge height up to 12 meters
- Hydraulically adjustable feed in height to compliment shredding and recycling plants
- 4 Meter tracks for superior maneuverability and stability
- Engines giving a rating of up to 800 TPH (880 USTPH)
- Fuel efficient hydraulics system.
- User friendly hydraulic controls
- Heavy duty impact bed

## DIMENSIONS AND CAPACITIES

Length - Transport	11.8m (38' 7")
Width - Transport	2.29m (7' 5")
Height - Transport	2.57m (8' 4")
Length - Working (Max)	30.5m (100')
Height - Working (Max)	13m (42' 6")
Maximum Production Rate	800TPH (880 USTPH) @ 23° angle

## STACKER RANGE

# ← F-50

## FEEDER STACKER

The EF-50 comprises of a 10ft feeder hopper that transfers material onto a 50ft conveyor.

Designed to allow operators to stockpile/transfer material, it eliminates double handling of materials.

The unit can also be compacted for transport into a 40ft high cube container, reducing transport costs.



DIESEL/HYDRAULICS



DUAL POWER



## FEATURES

- Hydraulic folding heading section for transport minimizing setup time
- Hydraulically adjustable discharge height up to 6.5 Meters
- 3.5 Meter tracks for superior manoeuvrability and stability
- Powerful engine giving a rating of up to 500 TPH\*
- Fuel efficient hydraulics system
- User friendly hydraulic controls
- Hopper extensions increasing capacity

\* Engine specifications vary. Check with your dealer.

## DIMENSIONS AND CAPACITIES

Length - Working (Max)	18.9m (62' 2")
Height - Working (Max)	6.5m (21' 3")
Length - Transport	11.98m (39' 4")
Width - Transport	2.3m (7' 6")
Height - Transport	2.6m (8' 5")
Maximum Production Rate	500 MTPH (550 TPH)
Max Product Size	100MM (4") minus
Weight	14500KG Approx. (Approx. 319,670lbs)
Hopper Capacity	6 M <sup>3</sup> ( 8 Yd <sup>3</sup> )

## STACKER RANGE

# F-80

### HIGH CAPACITY STOCKPILING

The EF-80 features a large feeder hopper that transfers material onto an 80ft conveyor. Designed to allow operators to stockpile/transfer material it eliminates double handling of materials.

The unit can also be compacted for transport on one low loader for easy site to site transport.



### FEATURES

- Dual hydraulic main drive system
- Hydraulic folding head section for transport minimizing setup time
- Hydraulically adjustable discharge height up to 10 meters
- 4 Meter tracks for superior manoeuvrability and stability
- CAT 4.4 100KW (127HP) LRC/Fixed speed giving a rating of up to 800 TPH
- Fuel efficient Hydraulics system.
- User Friendly Hydraulic Controls
- Hopper extensions increasing capacity

### DIMENSIONS AND CAPACITIES

Engine - Power Unit	CAT 4.4 100KW (127HP)
Transport Height	3.4m (11' 1")
Transport Length	19.4m (38' 8")
Transport Width	3.2m (10' 6")
Weight	24500kg (54,013 lbs)
Stockpile Height	9.6m (31' 5")
Stockpile Capacity	25.4m (83' 6")
Maximum Production Rate	800 TPH (880 USTPH)

## STACKER RANGE

# F-80R

### TRACKED RADIAL FEEDER STACKER

The EF-80R features a large feeder hopper that transfers material onto an 80ft conveyor, all fitted to a slew ring assembly allowing for full 360° radial.

Designed to allow operators to stockpile/transfer material it eliminates double handling of materials. Its maneuverability makes this unit very versatile and therefore is ideal for barge loading and unloading, rail loading / unloading and stockpiling. The ability to move parallel enables the operator to maneuver the unit parallel to the vessel meaning the machine can crab alongside.

The unit can also be compacted for transport on one low loader for easy site to site transport.



### FEATURES

- CAT 4.4 100KW (127HP) engine
- Hydraulic folding head section for transport minimizing setup time
- Hydraulically adjustable discharge height up to 10m
- Fuel efficient hydraulics system
- 4m tracks for superior maneuverability and stability
- User friendly hydraulic controls
- Dual hydraulic main drive system
- Remote near stabilizing legs for easy operator use
- Remote radio tracking
- Hopper extensions increasing capacity

### DIMENSIONS AND CAPACITIES

Engine	CAT 4.4 127 Hp
Transport Height	3.4m (11' 1")
Transport Length	19.4m (38' 8")
Transport Width	3.2m (10' 6")
Overhang transport	7.2m
Weight	27,500kg approx. (60,627 lbs)
Working Max Length	6.2m
Working Max Height	10m
Stockpile Height	10m (32' 10")
Hopper Capacity	13m <sup>3</sup> (17 yd <sup>3</sup> )
Maximum Production Rate	800 TPH
Radial	Full 360°

## STACKER RANGE

# ← RF-80

### FEEDER STACKER


The ERF-80 feeder stacker features a large feeder hopper that transfers material onto an 80ft conveyor and provides a rear, low level feed option to operators. Designed to allow operators to stockpile/transfer material it eliminates double handling of materials. The unit can also be compacted for transport on one low loader for easy site to site transport.



DIESEL/HYDRAULICS



DUAL POWER

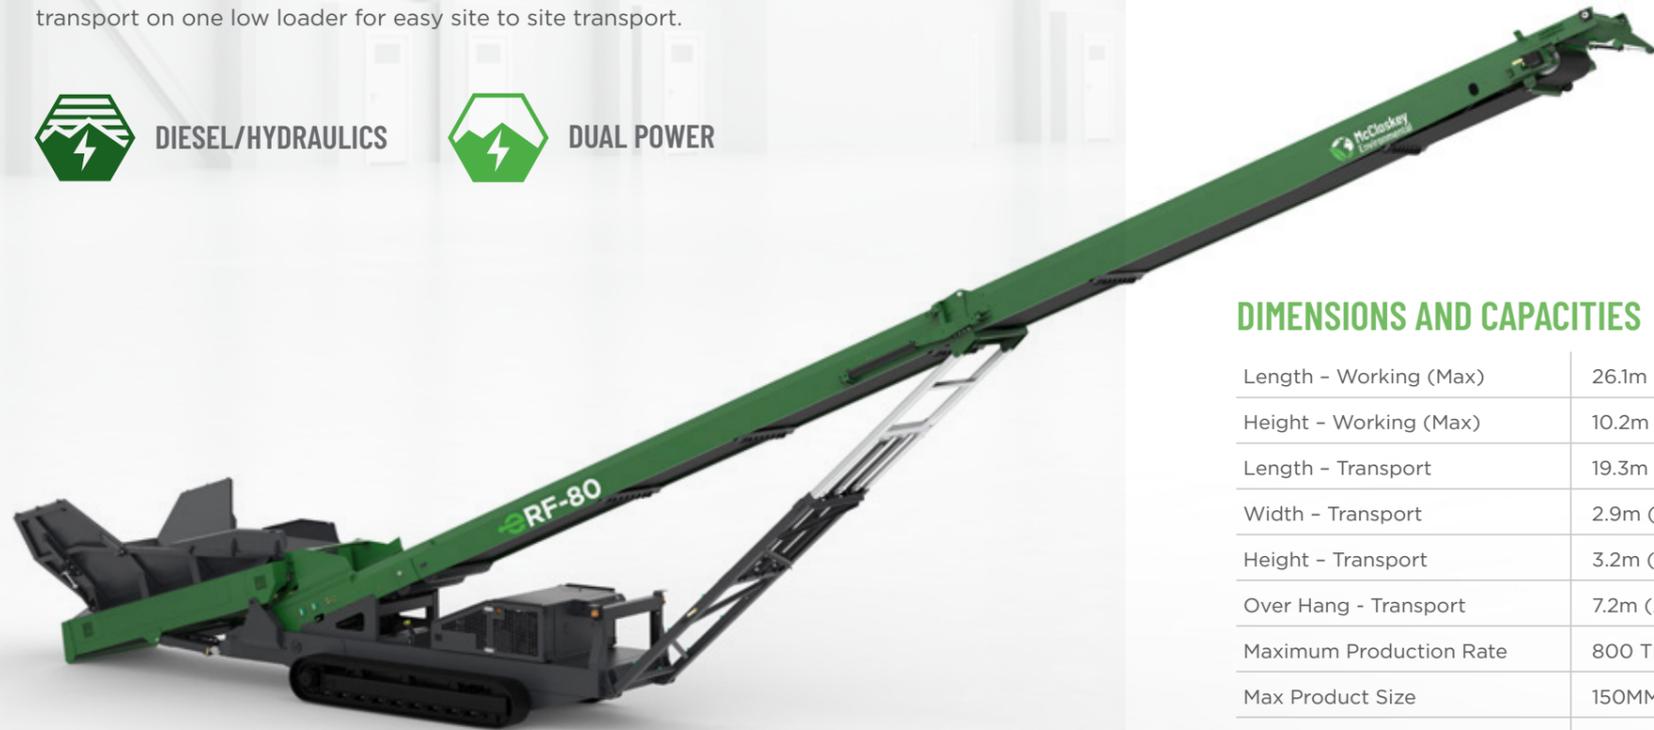

### FEATURES

- Dual hydraulic main drive system
- Hydraulic folding head section for transport minimizing setup time
- Hydraulically adjustable discharge height up to 10 meters
- 4 Meter tracks for superior maneuverability and stability
- Fuel efficient hydraulics system
- User friendly hydraulic controls
- Hopper greedy plates increasing capacity

### DIMENSIONS AND CAPACITIES

Length - Working (Max)	26.1m (85' 10")
Height - Working (Max)	10.2m (33' 7")
Length - Transport	19.3m (63' 4")
Width - Transport	2.9m (9' 5")
Height - Transport	3.2m (10' 6")
Over Hang - Transport	7.2m (23' 9")
Maximum Production Rate	800 TPH (880 USTPH)
Max Product Size	150MM ( 6") minus
Weight	24,500KG approx. (54,013lbs)
Hopper Capacity	10 M <sup>3</sup> (13 Yd <sup>3</sup> )

## STACKER RANGE

# ← RF-80R

### FEEDER STACKER

The ERF-80R feeder stacker features a large feeder hopper that transfers material onto an 80ft conveyor, all fitted to a slew ring assembly allowing for full 360° radial. Designed to allow operators to stockpile/transfer material, it eliminates double handling of materials. Its maneuverability makes this unit very versatile and makes it ideal for barge loading and unloading, rail loading / unloading and stockpiling, the ability to move parallel enables the operator to maneuver the unit parallel to the vessel meaning the machine can crab alongside.


The unit can also be compacted for transport on one low loader for easy site to site transport.



DIESEL/HYDRAULICS



DUAL POWER

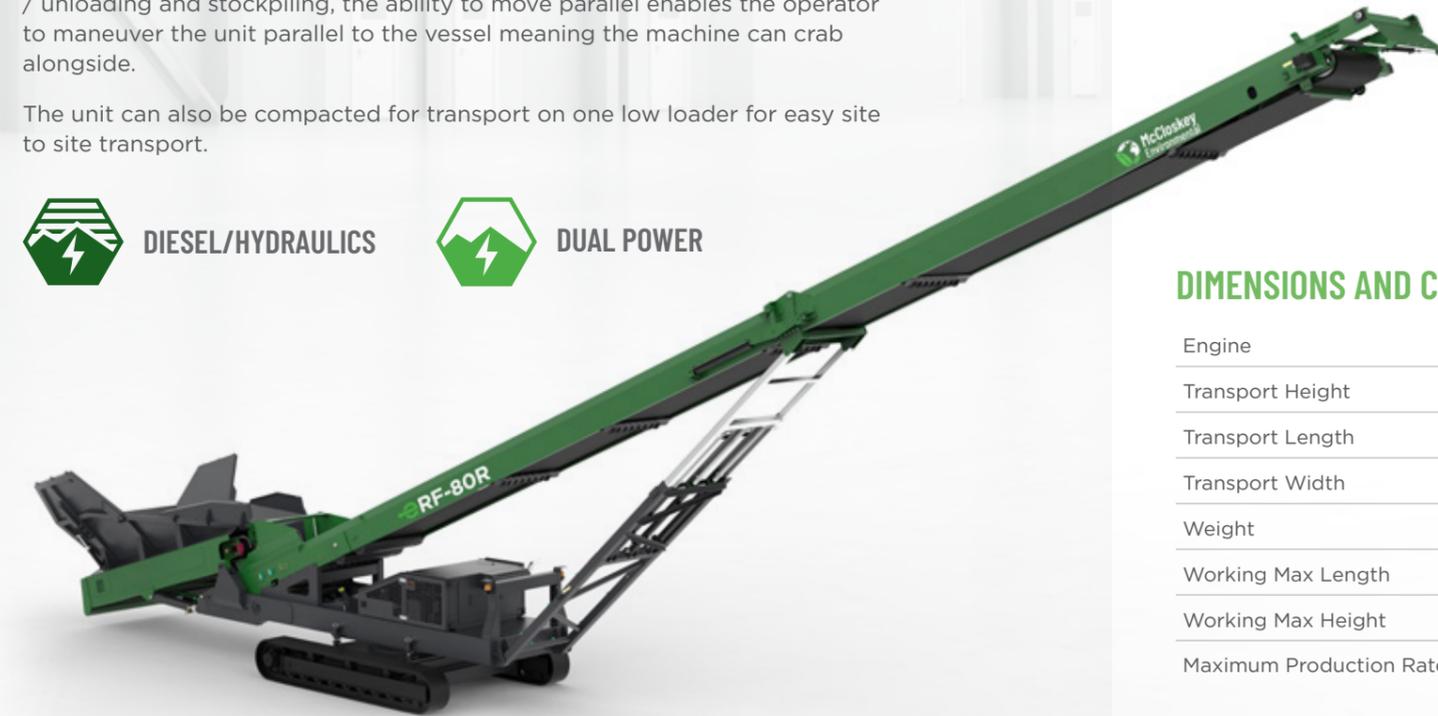

### FEATURES

- Dual hydraulic main drive system
- Hydraulic folding head section for transport minimizing setup time
- Hydraulically adjustable discharge height up to 10 meters
- High powered slew gearbox and slew ring assembly
- Radio Remote as standard
- 4 Meter tracks for superior maneuverability and stability
- Radio remote rear stabilizing legs for easy operator use
- Radio remote tracking
- Fuel efficient hydraulics system
- User friendly hydraulic controls
- Hopper extensions increasing capacity

### DIMENSIONS AND CAPACITIES

Engine	100KW (127HP)
Transport Height	3.2m (10' 6")
Transport Length	19.4m (63' 7")
Transport Width	2.9m (9' 5")
Weight	27500KG approx. (60,627lbs)
Working Max Length	26.3m (86' 4")
Working Max Height	10.5m (34' 6")
Maximum Production Rate	800 TPH (880 USTPH)

## SCREENERS

# ER-155

### HIGH CAPACITY LONG HOPPER SCREENER

The ER-155 High Energy Screener is a tough, robust screening tool designed to cope with the heaviest of applications. New for this ER-155 scalping screener, are longer hopper and an extended tail conveyor. This provides maximum load flexibility to customers and accommodates a larger variety of loaders and can work in a variety of sites around the world.

No More Slow Loading! The ER-155 is designed for use with larger loaders. The 16ft target is 25% larger, allowing for more material and no spillage, making this ER-155 an excellent mobile solution for materials handling operations.



DIESEL/HYDRAULICS



DUAL POWER



## FEATURES

- 5' X 16' heavy duty high energy 2 bearing screenbox
- Trademark to HARDOX™
- Direct feed HARDOX™™ lined hopper
- Travel out fixed walkways
- Integrated hydraulic folding stockpiling conveyors
- Fast on site setup time - 10 minutes
- Screen raises at lower end for easy bottom deck access
- Service standing room inside powerpack
- Track mobile

## DIMENSIONS AND CAPACITIES

Engine	130 Hp (98 kW) Diesel
Transport Height	11' 7" (3.53m)
Transport Length	50' 2" (15.30m)
Transport Width	9' 8" (3.54m)
Weight	36,100 Kgs (79,600 lbs)
Stockpile Height (Extended Tail Conveyor)	12' 3" (3.75m)
Stockpile Height (Side Fines Conveyor)	13' (3.96m)
Stockpile Height (Side Mid Conveyor)	11' 10" (3.60m)
Screenbox Dimensions	5' x 16' (155 ft²)

Flex-Flow screens are built to take on the toughest materials, screening effectively without build-up, blinding, and clogging.

The ER-155 and ER-230 Flex-Flow models work in tandem with other on-site equipment. With their fast set-up time and ability to move around job sites, the screeners are uniquely suited to projects where maneuverability is key.

- Designed for efficient screening
- Optimum recycling and processing of waste
- Maximum screening quality,
- Optimal return on investment
- Maximum performance
- Powerful & flexible

## SCREENERS

# ER-230

### HIGH CAPACITY LONG HOPPER SCREENER

The ER-230 High Energy Screener is one of the most robust, durable and powerful heavy-duty mobile screeners at work around the world today.

Designed to provide uncompromising production levels to heavy duty scalping operations, the ER-230 is capable of operating as a stand-alone plant producing finished product, or as a scalping recycled material to remove fines for picking station.

McCloskey Environmental's powerful High Energy Screener delivers higher outputs and a high-quality screened product with maximum efficiency.



DIESEL/HYDRAULICS



DUAL POWER



## FEATURES

- 6' X 20' (1.83M X 6.10M) heavy duty high energy 2 bearing screenbox
- Direct feed lined hopper
- Travel out fixed walkways
- Fast on site setup time - 10 minutes
- Integrated hydraulic folding stockpiling conveyors
- Screen raises at lower end for easy bottom deck access
- Service standing room inside powerpack

## DIMENSIONS AND CAPACITIES

Engine	225 Hp (168 kW) Diesel
Transport Height	11' 5.8" (3.50m)
Transport Length	55' 8" (16.97m)
Transport Width	9' 10" (3.00m)
Weight	82,000 lbs (37,200Kg)
Stockpile Height (Tail Conveyor)	12' 6" (3.83m)
Stockpile Height (Mid Product Conveyor)	12' (3.66m)
Stockpile Height (Fine Product Conveyor)	13' 5.3" (4.10m)
Screenbox Dimensions	6' x 20' (1.83m x 6.10m)

## TROMMEL RANGE

# ←↻ T-518

# ←↻ T-620

### EXCEPTIONALLY EFFECTIVE AT PRODUCING HIGH QUALITY FINE MATERIALS

McCloskey Environmental trommel range has strong engineering design, producing high production rates and unrivalled strength has ensured the trommel is the smart solution for a wide range of applications including Soil, Compost, Construction & demolition waste.

We provide heavy duty trommel screens with customisable drum openings to suit the customer's needs, to enable effective management of material.



## FEATURES

- Fast onsite set up time (10 minutes)
- Tracked mobility
- Proven, reliable technology
- Maximum operating time
- Low maintenance
- High fuel efficiency
- Low operating costs
- Dual Power available
- Automatic start up and shut down system
- Ground level brushes to keep the screen clean
- Drum drive with maximum torque traction and life
- Grizzly option available
- Hydraulic folding oversize conveyor

...COMING SOON



# ENVIRONMENT COMMITMENT

The key factors underpinning our sustainability strategy



**RECRUITING  
AND RETAINING  
EXCELLENT  
PEOPLE**



**DRIVING  
POSITIVE  
SUPPLIER  
RELATIONSHIPS**



**FURTHER  
IMPROVING  
CUSTOMER  
SATISFACTION**



**REDUCING  
WASTE AND  
INCREASING  
RECYCLING**



**BEING AN  
INNOVATOR AND  
LEADING THE  
WASTE INDUSTRY**



**BUSINESS  
VALUE**

# SUSTAINABLE WASTE MANAGEMENT

Sustainability is core to our overall business strategy, including sustainable waste management and we believe this makes us a better company to work for, to do business with, and to invest in.

**The key factors underpinning our sustainability strategy.**

Protecting the planet is no longer a choice, but an obligation.

We believe in a sustainable future and with the global engineering industry as our arena, we work together with our customers to turn this belief into reality for people everywhere.

McCloskey environmental will have a customer first attitude in order to ensure that our high quality machines have a more efficient & direct impact.

**What makes us different is our approach to business.**

Taking a proactive approach, we are unique in sharing our deep knowledge of waste management solutions, advising on how to best use our recycling products with designs tailored to meet customer requirements in construction and demolition to waste from energy production.

McCloskey Environment have listened to customers and have taken a strategic approach to focus on customer experience.

- Master product portfolio strategy
- Collaborative partnerships with key capabilities
- Global after sales and service support
- Sustainable operations - building resilient supply chain
- Exceptionally knowledgeable team - our people are committed to making a difference.



## PROVIDING SMART WASTE MANAGEMENT SOLUTIONS



CONSTRUCTION



DEMOLITION



SOLID WASTE



WASTE ENERGY



COMMERCIAL & INDUSTRIAL

## GLOBAL AFTER SALES & SERVICE SUPPORT



### SPARE PARTS AND MAINTENANCE KITS

McCloskey offers a full range of recommended spare part packages and maintenance kits. Speak to your dealer or your customer service representative about all the available options for shredder, screener and stacker ranges.

To keep your machine in peak condition, McCloskey Environmental offers a wide range of maintenance parts. Follow your machine's maintenance program to ensure productivity and uptime for peace of mind and extended machine life.



### MAINTENANCE SUPPORT

McCloskey's Dealer Network ensures that customers are supported by factory trained field service technicians for After Sales Support. Extensive training is crucial to the proper maintenance of equipment. McCloskey's trained service technicians familiarize the operators handling the equipment to ensure customers receive as much use and value out of their purchase.



### TECHNICAL SUPPORT & TRAINING

A comprehensive training program is available for all partners, service staff, equipping them with the correct skills, knowledge and practices to support you.

McCloskey Environmental hosts training events providing the latest product updates and training. Register your interest to book a tailored training program to suit you.



### BEYOND THE STANDARD

MCE has a competitive warranty policy and warrants its new equipment to be free of defects in material for a specified period. Specific warranty details are available from your local distributor or by emailing [technical aftermarket@mccloskeyinternational.com](mailto:technical aftermarket@mccloskeyinternational.com).



**McCloskey**  
Environmental

## HEADQUARTERS

McCloskey Environmental  
47 Moor Road, Coalisland, Co. Tyrone  
BT71 4QB N. Ireland

(+44) 28 8774 0926

## WORLDWIDE ENVIRONMENTAL

McCloskey Environmental  
1 McCloskey Road. Keene, Ontario  
K9J 0G6 Canada

+1 705-295-4925

**BUILDING SMARTER  
EQUIPMENT TO HELP  
MINIMISE THE WORLD'S WASTE**