



**McCloskey
Environmental**



S-250

The ES-250 is a tracked primary shredder capable of effectively and reliably shredding virtually any type of material. Designed to meet the needs of plants in which the incoming materials vary greatly in terms of size, composition, and difficulty to shred.


The interaction between the rotating knives on the dual shafts running asynchronously in both directions ensures the input material is constantly moving to prevent bridging and maximizing shredding efficiency.

FEATURES

- Aggressive 8 & 10 knife, heavy duty cutting table
- Intelligent electrical control unit
- Variable speed main conveyor
- 4m tracks for superior maneuverability and stability
- Volvo D13 380KW (510HP) stage v / tier 4 Final.*
- Fuel efficient hydraulics system
- User friendly hydraulic controls
- Double hydrostatic drive transmission



McCloskey Environmental

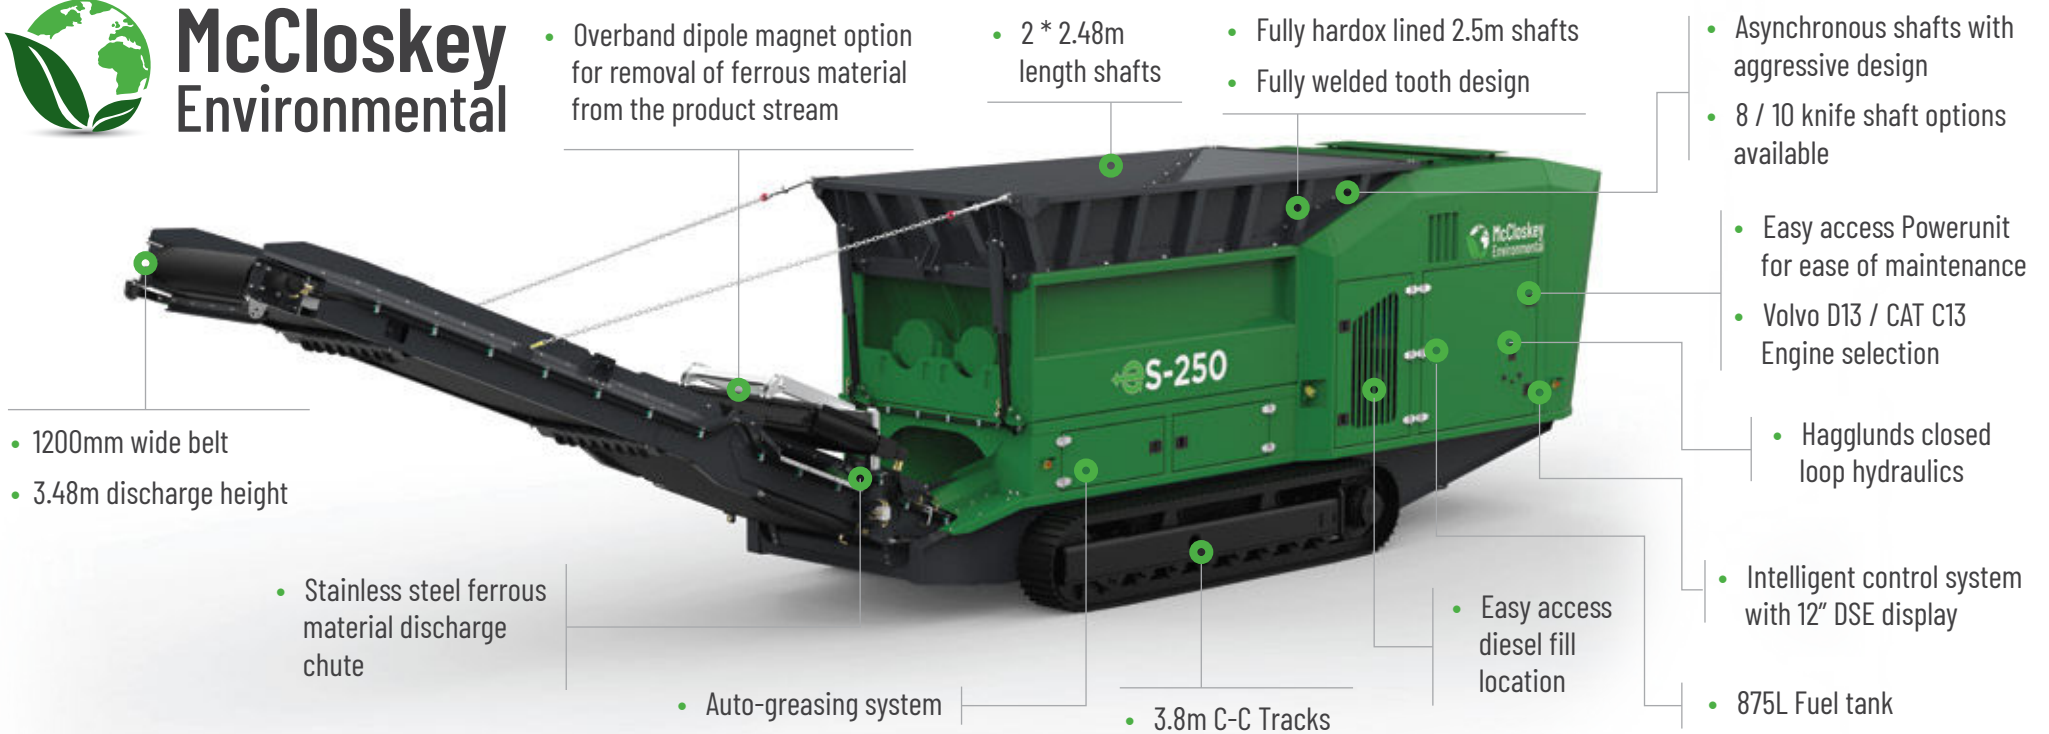

DIMENSIONS AND CAPACITIES

LENGTH - WORKING (MAX)	15.1M (49' 7")
HEIGHT - WORKING (MAX)	3.5M (11' 6")
LENGTH - TRANSPORT	9.54M (31' 4")
WIDTH - TRANSPORT	3.01M (9' 11")
HEIGHT - TRANSPORT	3.50M (11' 6")
MAXIMUM PRODUCTION RATE	100TPH (MATERIAL DEPENDENT)
AVERAGE FUEL CONSUMPTION	60 L/HOUR (15.5 US GAL)
MACHINE WEIGHT	35,000KG (77,160 LBS.)

CUTTING TABLE

NUMBER OF SHAFTS	2
ROTATING SPEED	16-41/27-56 RPM
NUMBER OF KNIVES	8/10
NUMBER OF COUNTER KNIVES	16/20
CUTTING AREA	2420MM X 2000MM (95" X 79")
KNIFE TYPE	SHEER TABLE
CHAMBER WEIGHT	14,900KG (32,850 LBS.)

© Copyright 2021 McCloskey Environmental. All rights reserved. McCloskey is a trademark of McCloskey International.

McCloskey Environmental reserves the right to make changes to the information and design of the machines on this brochure without reservation and notification to the users. Information at time of print considered accurate – McCloskey Environmental assumes no liability resulting from errors or omissions in this document.